


LED SMPS분야 국내 **NO.1** Brand Power

ELGENTECH

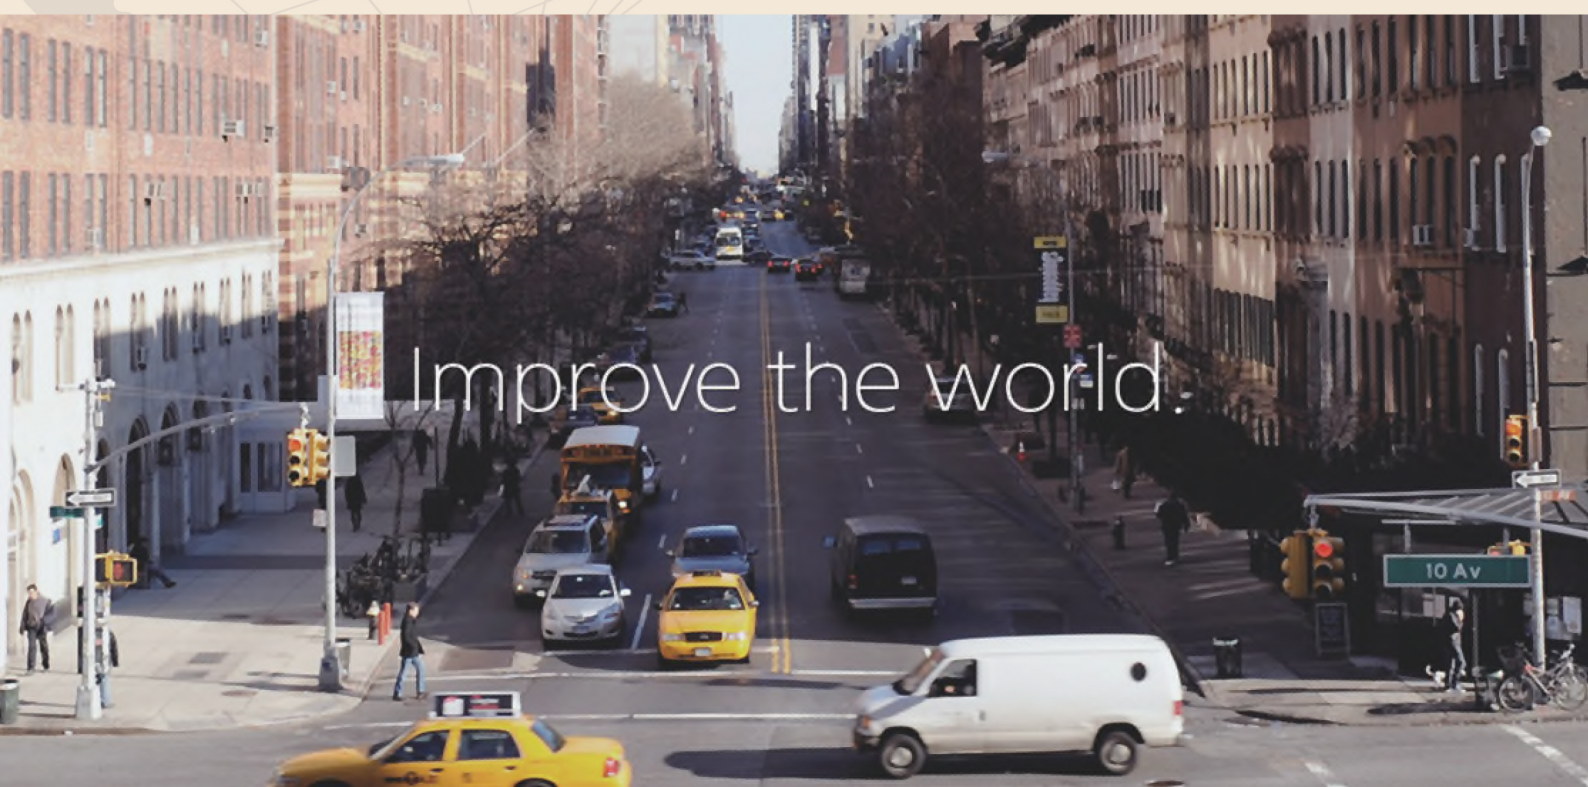

Improve the world.

표준 제품

Model	Rated Watt	IP	Input (AC)	Output (DC)	Power Factor 역률	Efficiency 효율	Operating Temp.	Dimming
SLA-30A(D)	25~30W	IP67	110 / 220VAC	24~56V	0.90<@	85%<@	-30~50℃	X(O)
SLA-40A(D)	30~40W	IP67	110 / 220VAC	24~56V	0.90<@	85%<@	-30~50℃	X(O)
SLA-50A(D)	40~50W	IP67	110 / 220VAC	24~56V	0.90<@	85%<@	-30~50℃	X(O)
SLA-70A(D)	55~70W	IP67	110 / 220VAC	24~56V	0.90<@	87%<@	-30~50℃	X(O)
SLA-100H(D)	75~100W	IP67	110 / 220VAC	24~56V	0.95<@	90%<@	-30~50℃	X(O)
SLA-150H(D)	100~150W	IP67	110 / 220VAC	24~56V	0.95<@	90%<@	-30~50℃	X(O)
SLA-200H(D)	150~200W	IP67	110 / 220VAC	24~56V	0.95<@	92%<@	-30~50℃	X(O)
SLA-250H(D)	200~250W	IP67	110 / 220VAC	24~56V	0.95<@	92%<@	-30~50℃	X(O)

도로공사 표준 제품

Model	Rated Watt	IP	Input (AC)	Output (DC)	Power Factor 역률	Efficiency 효율	Operating Temp.	Dimming
SLA-25EXF	25W	IP65	110 / 220VAC	27~32V / 0.7A(CH) 1CH	0.90<@	85%<@	-30~50℃	O
SLA-25EX	25W	IP67	110 / 220VAC	27~32V / 0.7A(CH) 1CH	0.90<@	85%<@	-30~50℃	O
SLA-75EX	75W	IP67	110 / 220VAC	27~32V / 0.7A(CH) 3CH	0.90<@	87%<@	-30~50℃	O
SLA-100EX	100W	IP67	110 / 220VAC	27~32V / 0.7A(CH) 4CH	0.95<@	90%<@	-30~50℃	O
SLA-150EX	150W	IP67	110 / 220VAC	27~32V / 0.7A(CH) 6CH	0.95<@	90%<@	-30~50℃	O
SLA-200EX	200W	IP67	110 / 220VAC	27~32V / 0.7A(CH) 8CH	0.95<@	92%<@	-30~50℃	O
SLA-250EX	250W	IP67	110 / 220VAC	27~32V / 0.7A(CH) 10CH	0.95<@	92%<@	-30~50℃	O

서울시 표준 제품

Model	Rated Watt	IP	Input (AC)	Output (DC)	Power Factor 역률	Efficiency 효율	Operating Temp.	Dimming
SLA-15SL(D)	15W	IP67	110 / 220VAC	15~22V / 0.7A	0.90<@	82%<@	-30~50℃	X(O)
SLA-25SL(D)	25W	IP67	110 / 220VAC	24~38V / 0.7A	0.95<@	85%<@	-30~50℃	X(O)
SLA-50SL(D)	50W	IP67	110 / 220VAC	34~72V / 0.7A	0.95<@	88%<@	-30~50℃	X(O)
SLA-75SL(D)	75W	IP67	110 / 220VAC	66~108V / 0.7A	0.95<@	90%<@	-30~50℃	X(O)
SLA-100SL(D)	100W	IP67	110 / 220VAC	95~143V / 0.7A	0.95<@	90%<@	-30~50℃	X(O)
SLA-150SL(D)	150W	IP67	110 / 220VAC	160~210V / 0.7A	0.95<@	92%<@	-30~50℃	X(O)
SLA-200SL(D)	200W	IP67	110 / 220VAC	220~250V / 0.7A	0.95<@	92%<@	-30~50℃	X(O)

광주시 표준 제품

Model	Rated Watt	IP	Input (AC)	Output (DC)	Power Factor 역률	Efficiency 효율	Operating Temp.	Dimming
SLA-50GJ	50W	IP67	110 / 220VAC	27~32V / 0.7A(CH) 2CH	0.95<@	87%<@	-30~50℃	X
SLA-75GJ	75W	IP67	110 / 220VAC	27~32V / 0.7A(CH) 3CH	0.95<@	88%<@	-30~50℃	X

공장등 제품

Model	Rated Watt	IP	Input (AC)	Output (DC)	Power Factor 역률	Efficiency 효율	Operating Temp.	Dimming
SLA-100F(D)	70~100W	IP65	110 / 220VAC	24~56V	0.95<@	88%<@	-30~50℃	X(O)
SLA-150F(D)	100~150W	IP65	110 / 220VAC	24~56V	0.95<@	90%<@	-30~50℃	X(O)
SLA-200F(D)	150~200W	IP65	110 / 220VAC	24~56V	0.95<@	92%<@	-30~50℃	X(O)

실내용 제품

Model	Rated Watt	IP	Input (AC)	Output (DC)	Power Factor 역률	Efficiency 효율	Operating Temp.	Dimming
ILA-30S	30W	-	110 / 220VAC	24~54V	0.90<@	85%<@	-20~50℃	X
ILA-50S	50W	-	110 / 220VAC	24~54V	0.90<@	85%<@	-20~50℃	X

태양광용 제품 (DC/DC)

Model	Rated Watt	IP	Input (AC)	Output (DC)	Power Factor 역률	Efficiency 효율	Operating Temp.	Dimming
SLD-60S	60W	IP67	12~30V	24~54V	-	93%<@	-30~50℃	X
SLD-150S	150W	IP67	12~30V	24~54V	-	93%<@	-30~50℃	X



SLA-36A(D)

입력 110 / 220VAC
 출력 24~56V
 사이즈 158(125) X 58.1 X 37.1
 무게 0.46 kg



SLA-50A(D)

입력 110 / 220VAC
 출력 24~56V
 사이즈 158(125) X 58.1 X 37.1
 무게 0.46 kg



SLA-70A(D)

입력 110 / 220VAC
 출력 24~56V
 사이즈 188(155) X 58.1 X 37.1
 무게 0.60 kg



SLA-100H(D)

입력 110 / 220VAC
 출력 24~56V
 사이즈 223(196) X 68 X 39.7
 무게 0.90 kg



SLA-150H(D)

입력 110 / 220VAC
 출력 24~56V
 사이즈 223(196) X 68 X 39.7
 무게 0.90 kg



SLA-200H(D)

입력 110 / 220VAC
 출력 24~56V
 사이즈 240(210) X 78 X 46.9
 무게 1.20 kg



SLA-250H(D)

입력 110 / 220VAC
 출력 24~56V
 사이즈 240(210) X 78 X 46.9
 무게 1.20 kg



SLA-25EX

입력 110 / 220VAC
출력 27~32V / 0.7A(CH) 1CH
사이즈 270 X 80 X 44.7
무게 0.63 kg



SLA-75EX

입력 110 / 220VAC
출력 27~32V / 0.7A(CH) 3CH
사이즈 270 X 80 X 45.5
무게 0.78 kg




SLA-100EX

입력 110 / 220VAC
출력 27~32V / 0.7A(CH) 4CH
사이즈 259.5 X 68 X 41
무게 0.96 kg



SLA-150EX

입력 110 / 220VAC
출력 27~32V / 0.7A(CH) 6CH
사이즈 259.5 X 68 X 41
무게 0.96 kg

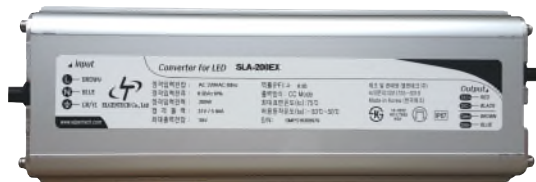

SLA-200EX

입력 110 / 220VAC
출력 27~32V / 0.7A(CH) 8CH
사이즈 264 X 80 X 46.9
무게 1.23 kg



SLA-250EX

입력 110 / 220VAC
출력 27~32V / 0.7A(CH) 10CH
사이즈 264 X 80 X 46.9
무게 1.23 kg



SLA-15SL(D)

입력 110 / 220VAC
 출력 15~22V / 0.7A
 사이즈 270 X 80 X 34
 무게 0.51 kg



SLA-25SL(D)

입력 110 / 220VAC
 출력 21~41V / 0.7A
 사이즈 270 X 80 X 34
 무게 0.51 kg



SLA-50SL(D)

입력 110 / 220VAC
 출력 41~72V / 0.7A
 사이즈 270 X 80 X 34
 무게 0.51 kg



SLA-75SL(D)

입력 110 / 220VAC
 출력 66~108V / 0.7A
 사이즈 270 X 80 X 41
 무게 0.92 kg



SLA-100SL(D)

입력 110 / 220VAC
 출력 95~143V / 0.7A
 사이즈 270 X 80 X 41
 무게 0.92 kg



SLA-150SL(D)

입력 110 / 220VAC
 출력 160~210V / 0.7A
 사이즈 259.5 X 68 X 41
 무게 0.96 kg



SLA-200SL(D)

입력 110 / 220VAC
 출력 220~250V / 0.7A
 사이즈 259.5 X 68 X 41
 무게 0.96 kg



SLA-50GJ

입력 110 / 220VAC
 출력 27~32V / 0.7A(CH) 2CH
 사이즈 187(163) X 68 X 39.7
 무게 0.76 kg



SLA-75GJ

입력 110 / 220VAC
 출력 27~32V / 0.7A(CH) 3CH
 사이즈 187(163) X 68 X 39.7
 무게 0.76 kg

LED SMPS분야 국내 **NO.1** Brand Power



SLA-100F(D)

입력 110 / 220VAC
 출력 24~56V
 사이즈 187(163) X 68 X 39.7
 무게 0.76 kg



SLA-150F(D)


입력 110 / 220VAC
 출력 24~56V
 사이즈 223(196) X 68 X 39.7
 무게 0.90 kg




SLA-200F(D)

입력 110 / 220VAC
 출력 24~56V
 사이즈 240(210) X 78 X 46.9
 무게 1.20 kg


도로공사, 서울시 제품 도면

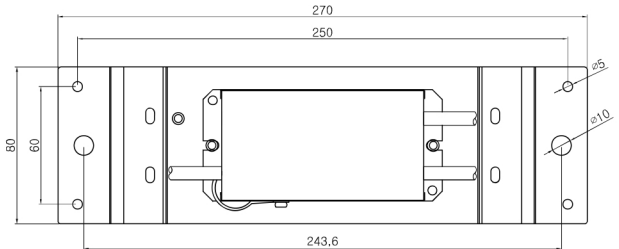


● 서울시 15W~50W용
도로공사 25W용

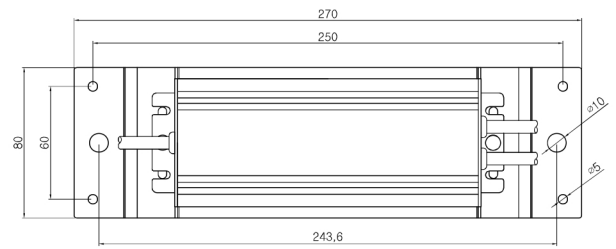


● 서울시 75W~100W용

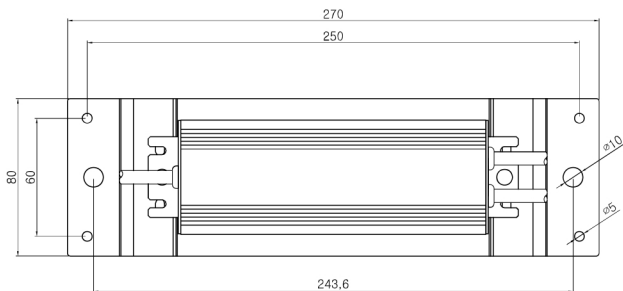

● 도로공사 75W용

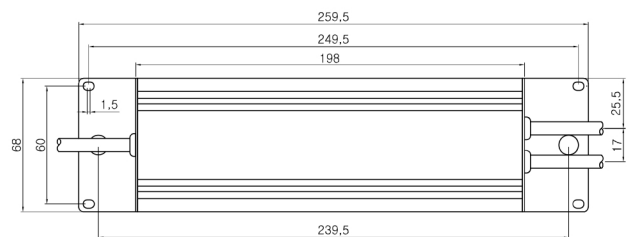

● 서울시 150W~200W용
도로공사 100W~150W용

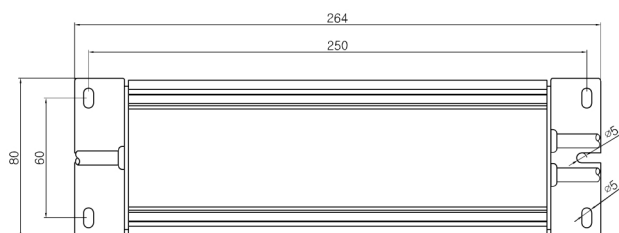

● 도로공사 200W~250W용



Improve the world
Best quality with LED Converter



경기도 수원시 권선구 고색동 산업로92번길 106(우) 디엠피 202호
WWW.ELGENTECH.COM